

P3-10 Recycling

High pressure plunger pump


Robust and reliable.

Small, but powerful – it is the ideal pump for sewer cleaning – now it can be used as a recycling pump too. This means greater availability and longer operation time for rough day-to-day operation. Compact design and high-quality material ensure reliable operation and increase the performance of your machine.

Advantages at a glance

- New elastomer-sealed mushroom valves to avoid particle jet erosion
- High resistance against corrosion
- Long service life through pump valves which can be used on both sides
- Plunger seal designed as maintenance-free, spring-pretensioned package with additional wear protection bushing
- Individually replaceable stuffing boxes
- Protection from water entry into the power end due to isolated construction
- Fast and quick drainage due to lifting of the suction valve (optional)

Technical data	P3-10 Recycling
Pressure range	125 / 160 / 200 / 250 bar
Flow rate	163 l/min at 125 bar 80 l/min at 250 bar
Max. driving power	38 kW
Weight	approx. 83 kg
1 bar = 14.5038 psi, 1l = 0.26417 Gal., 1 kW = 1.3410 HP, 1mm = 0.03937 inch	

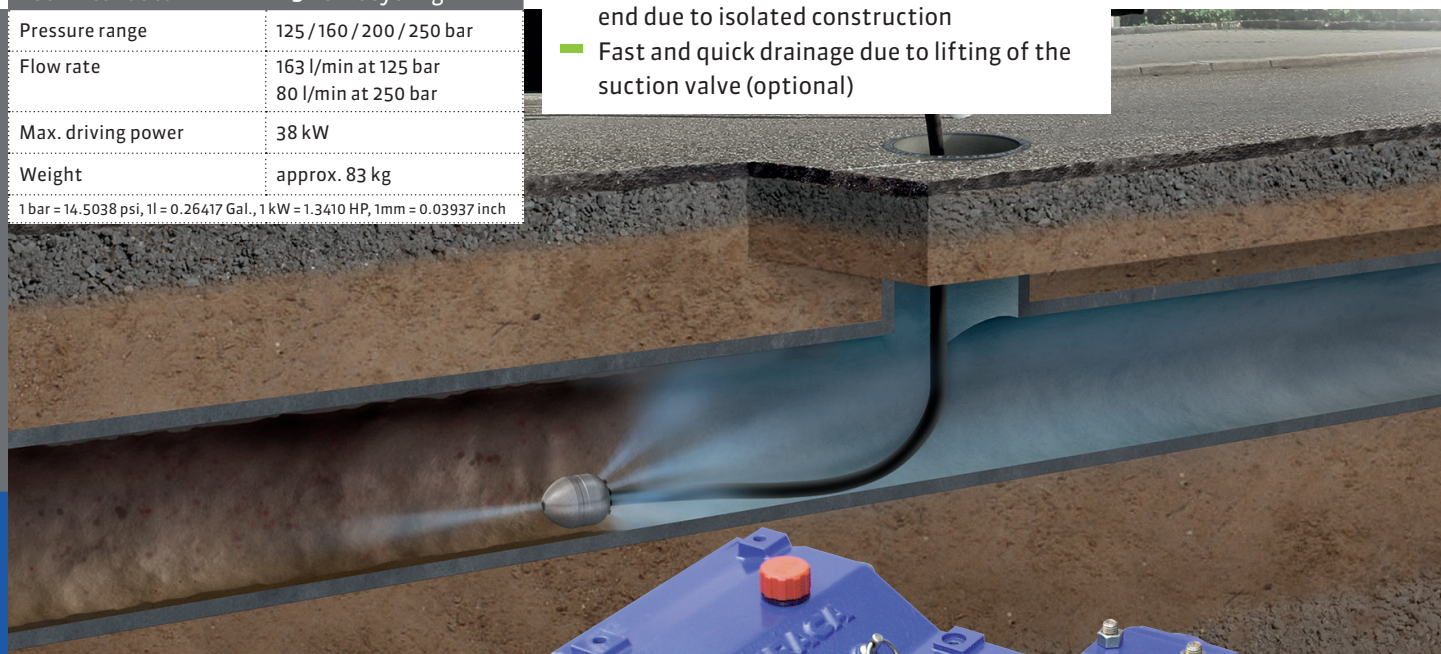

High Pressure Technology

